


Sure Lock™

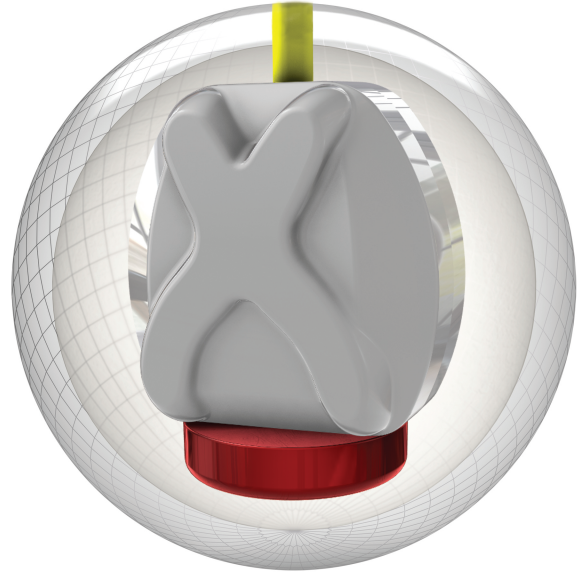

COVERSTOCK: GI-17™ Solid Reactive

WEIGHT BLOCK: RAD-X™ Core

FACTORY FINISH: 2000-grit Abralon®

BALL COLOR: Navy / Electric / Orange

DUROMETER: 73-75 Rex D-scale

FLARE POTENTIAL: 6" Plus (High)

FRAGRANCE: Orange Clove

WEIGHTS: 12-16 lbs.

SKU: TLK

Lbs.	RG	Diff.	Intermediate Diff.	Weight Block
16	2.47	0.055	0.019	
15	2.48	0.054	0.018	
14	2.52	0.054	0.017	
13	2.57	0.032	0.010	
12	2.59	0.029	0.008	

Resurfacing to a 2000-grit Factory Finish

Resurface to the original factory finish using a ball spinner.

1. 360-grit Abralon® - Sand for 30 seconds on all four sides with light pressure.
2. 2000-grit Abralon® - Sand for 10 seconds on all four sides with light pressure.

Storm recommends using the suggested cleaner/polish daily. Storm also recommends touching up the surface with only the final step every 20 games and resurfacing completely every 30-50 games.



Use Reacta Skuff™ after every session.