


# Optimus™ Solid

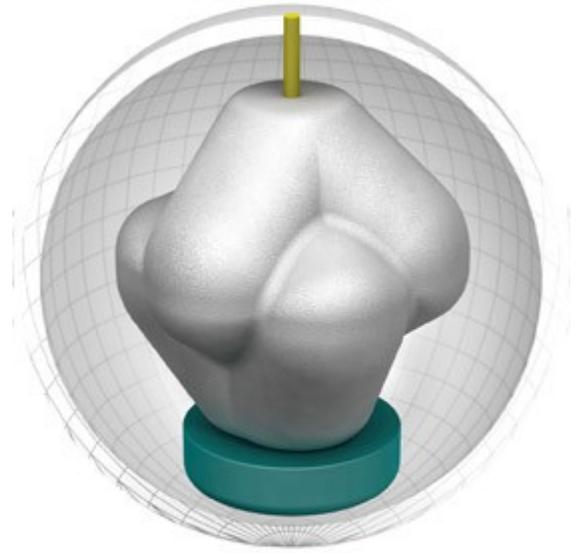

**COVERSTOCK:** R2X™ Solid Reactive

**WEIGHT BLOCK:** Tri-Sphere™ Core

**LIGHT WEIGHT BLOCK:** Modified Centripetal™ Core

**FACTORY FINISH:** 2000-grit Pad

**BALL COLOR:** Red/Navy/Yellow

**DUROMETER:** 74-76 Rex D-scale

**FLARE POTENTIAL:** 5" - 6" (High)

**FRAGRANCE:** Cranberry Craze

**WEIGHTS:** 12-16 lbs.

Lbs.	RG	Diff.	Weight Block
16	2.47	0.048	
15	2.48	0.048	
14	2.53	0.046	
13	2.59	0.045	
12	2.65	0.035	

## Resurfacing to a 2000-grit Factory Finish

Resurface to the original factory finish using a ball spinner.

1. 360-grit Pad - Sand for 30 seconds on all four sides with light pressure.
2. 2000-grit Pad - Sand for 10 seconds on all four sides with light pressure.

Storm recommends using the suggested cleaner/polish daily. Storm also recommends touching up the surface with only the final step every 20 games and resurfacing completely every 30-50 games.



Use Reacta Skuff™ after every session.

